


Rodamiento conico

XAB-32010X-YKB-32010X-TIMKEN - XAB-32010X-YKB-32010X-TIMKEN

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/conico/xab-32010x-ykb-32010x-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • IsoClass

IsoClass

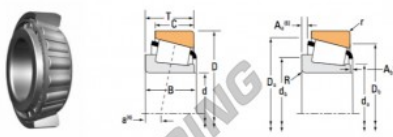

Bearing Dimensions			Load Ratings						Part Number			
Bore d	O.D. D	Width T	Dynamic ⁽¹⁾		Factor ⁽²⁾		Dynamic ⁽³⁾		Factor ⁽³⁾		Static C ₀	Assembly Inner/Outer
mm	mm	mm	C ₁	N	e	C ₀₂	C ₀₃	K	N	N		
50.000	82.000	21.500	82700	6.40	1.42	21500	10500	3400	1.38	82700	20500	XAB-32010X-YKB-32010X
1.9685	3.2283	0.8465	18650			4525	2400					

Bearing Dimensions										Geometry Factors		Bearing Weight		
Shaft					Housing					Cage				
Width B	Width C	ER Dr. a ⁽⁴⁾	Max Shaft Fillet Radius R ⁽⁵⁾	Backing Shoulder Dia. d ₄	Max Housing Fillet Radius r ⁽⁶⁾	Backing Shoulder Dia. D ₄	D ₅	A ₁ ⁽⁷⁾	A ₂ ⁽⁷⁾	G ₁	G ₂	C ₃		
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	
20.000	17.000	-0.8	3.0	55.0	62.0	0.5	77.0	75.0	0.9	2.1	34.0	33.3	0.980	0.41
0.7874	0.6692	-0.36	0.12	2.17	2.44	0.02	3.03	2.99	0.03	0.08			0.53	

CARACTERÍSTICAS DEL PRODUCTO

Marca	TIMKEN
Nº Ean13	3663952332024
Diámetro interior	50 mm
Diámetro exterior	82 mm
Espesor	21.5 mm
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE