


Rodamiento conico

XAD32010X-32010X-TIMKEN - XAD32010X-32010X-TIMKEN

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/conico/xad32010x-32010x-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • IsoClass

IsoClass

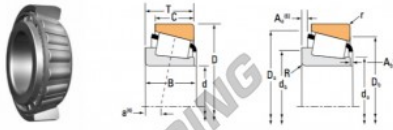

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic ⁽¹⁾ C ₁	Factor ⁽²⁾ e	Dynamic ⁽³⁾ C ₂	Factor ⁽³⁾ K	Static C ₀	Assembly Inner/Outer		
mm	mm	mm	N		N	N	N			
in.	in.	in.	lbf		lbf	lbf	lbf			
50.000	86.000	20.000	82700	0.42	21500	15000	1.38	82700	XAD32010X/32010X	
1.9685	3.1496	0.7874	18600		4822	3400		20800		

Bearing Dimensions										Geometry Factors		Bearing Weight			
Shaft					Housing					C ₁	C ₂		C ₃		
Width B	Width C	ER Dr. a ⁽⁴⁾	Max Shaft Fillet Radius R ⁽⁵⁾	Backing Shoulder Dia. d ₄	Max Housing Fillet Radius r ⁽⁶⁾	Backing Shoulder Dia. D ₄	D ₅	D ₆	A ₁ ⁽⁷⁾			A ₂ ⁽⁷⁾		G ₁	G ₂
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.
20.000	15.900	-0.8	1.5	56.0	59.0	1.0	77.0	73.0	8.5	2.1	34.0	20.3	0.080	0.36	
0.7874	0.6102	-0.08	0.06	2.20	2.32	0.04	3.03	2.87	0.03	0.09				0.82	

CARACTERÍSTICAS DEL PRODUCTO

Marca	TIMKEN
Nº Ean13	3663952332031
Diámetro interior	50 mm
Diámetro exterior	80 mm
Espesor	20 mm
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE