


Rodamiento conico 32930-TIMKEN - 32930-TIMKEN

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/conico/32930-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • IsoClass

IsoClass

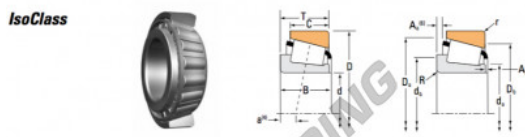

Bearing Dimensions			Load Ratings					Part Number	
Bore d	O.D. D	Width T	Dynamic ⁽¹⁾ C ₁	Factor ⁽²⁾ e	Dynamic ⁽³⁾ C ₂	Factor ⁽⁴⁾ K	Static C ₀	Assembly Inner/Outer	Part Number
mm	mm	mm	N		N		N		
in	in	in	lbf		lbf		lbf		
150.000	210.000	38.000	524000	0.33	849000	1.78	579000		2030
5.905	8.2677	1.4961	128500		189000		129000		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Width		ER Co. μm	Drift		Housing		Cage		G ₁	G ₂	C ₃	kg		
B	C		Max Shaft Fillet Radius R ⁽¹⁾	Backing Shoulder Dia. d _s	Max Housing Fillet Radius r ⁽²⁾	Backing Shoulder Dia. D _s	A ₁ ⁽³⁾	A ₂ ⁽⁴⁾						
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		
in	in	in	in	in	in	in	in	in	in	in	in	in		
38.000	36.000	-1.5	2.5	160.0	160.0	2.0	200.0	197.0	1.5	2.0	428.9	151.2	0.1167	3.89
1.4961	1.4173	-0.06	0.10	6.30	6.30	0.08	7.87	7.76	0.06	0.08	16.91	5.95	0.0046	0.11

CARACTERÍSTICAS DEL PRODUCTO

Marca	TIMKEN
Nº Ean13	3663952354040
Diámetro interior	150 mm
Diámetro exterior	210 mm
Espesor	38 mm
Peso	4000 g
Envasado	1
Estándar	Ninguna norma

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE