


## Rodamiento conico 32064X-TIMKEN - 32064X-TIMKEN

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/conico/32064x-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • IsoClass

**IsoClass**

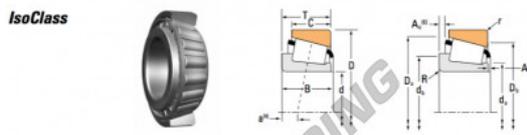

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Dynamic <sup>(3)</sup> C <sub>2</sub>	Factor <sup>(2)</sup> K	Static C <sub>0</sub>	Assembly Inner/Outer		
mm	mm	mm	N		N		N			
320.000 12.5984	480.000 18.9071	100.000 3.9370	1800000 400000	0.16 1.27	480000 190000	367000 85000	3420000 780000		32064X	

Mounting Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					Cage				
Width B	Width C	ER Co. a <sup>(1)</sup>	Max Shaft Fillet Radius R <sup>(1)</sup>	Backing Shoulder Dia. d <sub>s</sub>	Max Housing Fillet Radius r <sup>(1)</sup>	Backing Shoulder Dia. D <sub>s</sub>	Backing Shoulder Dia. D <sub>s</sub>	A <sub>1</sub> <sup>(1)</sup>	A <sub>2</sub> <sup>(1)</sup>	G <sub>1</sub>	G <sub>2</sub>	C <sub>2</sub>	kg	
100.000 3.9370	76.000 2.9921	4.3 0.17	0.0 0.0	343.0 13.50	357.0 14.06	4.0 0.16	481.0 18.94	462.0 17.80	13.5 0.53	5.3 0.21	207.3 8.199	201.4 7.959	0.1999 0.071	59.62 2.144

### CARACTERÍSTICAS DEL PRODUCTO

Marca	TIMKEN
Nº Ean13	3663952354217
Diámetro interior	320 mm
Diámetro exterior	480 mm
Espesor	100 mm
Peso	59620 g
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE