


Rodamiento conico 95528-95927CD-TIMKEN - 95528-95927CD-TIMKEN

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/conico/95528-95927cd-timken>

TAPERED ROLLER BEARINGS
DOUBLE-ROW • TYPE TDO

TYPE TDO

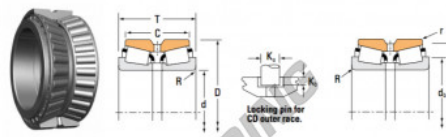

| Bearing Dimensions | | | | Load Ratings | | | | | | | |
|--------------------|---------|---------|---------------------------|------------------------|-------|-----------------------|----------------|------------------------|----------------|-----------------------|------|
| Bore d | O.D. D | Width T | Double Outer Ring Width C | Dynamic ⁽¹⁾ | | Static ⁽²⁾ | | Dynamic ⁽³⁾ | | Factor ⁽⁴⁾ | |
| mm | mm | mm | mm | C ₁₀ | C | C ₀ | C ₀ | C ₁₀ | C ₀ | C ₀ | K |
| 133.350 | 234.950 | 142.875 | 94.300 | 100000 | 23000 | 163000 | 103000 | 103000 | 22200 | 204000 | 1.58 |
| 5.250 | 9.250 | 5.6250 | 4.5000 | 280000 | 0.37 | 1.83 | 2.72 | 36700 | 22200 | 63600 | |

| Part Number | | Shaft | | | | Housing | | | | Pin | | Geometry Factors | | | Bearing Weight |
|-------------|---------|---|--------------------------------------|---|--------------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|------------------|--|--|----------------|
| Inner | Outer | Max. Shaft Fillet Radius R _f | Backing Shoulder Dia. d _s | Max. Housing Fillet Radius r _h | Backing Shoulder Dia. D _s | K ₁ | K ₂ | G ₁ | G ₂ | C ₁ | C ₂ | | | | |
| 95528 | 95927CD | 4.8 | 157.8 | 1.5 | 217.8 | 22.23 | 8.73 | 453.9 | 15.4 | 0.1323 | 23.89 | 52.87 | | | |
| | | 0.15 | 8.18 | 0.06 | 8.54 | 0.88 | 0.34 | | | | | | | | |

CARACTERÍSTICAS DEL PRODUCTO

| | |
|-------------------|---------------|
| Marca | TIMKEN |
| Nº Ean13 | 3663952359779 |
| Diámetro interior | 133.35 mm |
| Diámetro exterior | 234.95 mm |
| Espesor | 142.875 mm |
| Envasado | 1 |

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE