


Rodamiento conico

HM252348-HM252312D-TIMKEN - HM252348-HM252312D-TIMKEN

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/conico/hm252348-hm252312d-timken>

TAPERED ROLLER BEARINGS
DOUBLE-ROW • TYPE TDD

TYPE TDD

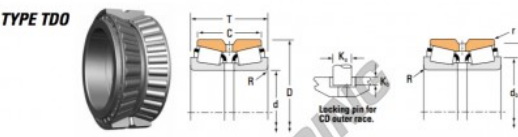

Bearing Dimensions				Load Ratings							
Bore d	O.D. D	Width T	Double Outer Ring Width C	Dynamic ⁽¹⁾		Static ⁽²⁾		Dynamic ⁽³⁾		Factor ⁽⁴⁾	
mm	mm	mm	mm	C ₁₀	C	N	Y ₁	Y ₂	C ₉₀	C ₅₀	K
in	in	in	in	N	mm	N	mm	mm	N	N	mm
260.350	422.918	178.982	178.982	3610000	0.33	2.03	3.02	389000	271000	673000	1.28
10.2500	16.6500	7.0432	7.0432	587000				87400	43700	103000	

Part Number		Dimensions				Pin		Geometry Factors			Bearing Weight
Inner	Outer	Max. Shaft Fillet Radius R ₁	Backing Shoulder Dia. d ₁	Max. Housing Fillet Radius r ₁	Backing Shoulder Dia. D ₁	K ₁	K ₂	G ₁	G ₂	C ₁	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
HM252348	HM252312D	6.8	292.8	1.5	395.5	-	-	1504.3	147.8	0.1482	83.31
		0.27	11.50	0.06	15.73						183.66

CARACTERÍSTICAS DEL PRODUCTO

Marca	TIMKEN
Nº Ean13	3663952362427
Diámetro interior	260.35 mm
Diámetro exterior	422.91 mm
Espesor	178.592 mm
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE