


Rodamiento de agujas GBRI365628-UU-IKO - GBRI365628-UU-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/agujas/gbri365628-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

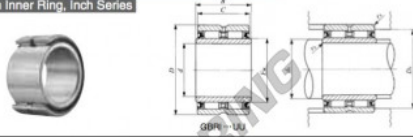

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
57.150 (2 1/4)	GBRI 365628 UU		1 050	57.150 ± 0.015	88.900 ± 0.025	44.450 ± 0.025			
B	F _w	Standard mounting dimensions - mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		Min.	Max.	D _s Max.					r _{as max} ⁽¹⁾
44.700	69.850 ± 0.025	65	67	82	1.5	97 200	197 000	1 100	LRBZ 364428

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to grease lubrication.
Remark: This roller ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3663952383552
Diámetro interior	57.15 mm
Diámetro interior	2 1/4" inch
Diámetro exterior	88.9 mm
Diámetro exterior	3 1/2" inch
Espesor	44.45 mm
Espesor	1 3/4" inch
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE