


Rodamiento de agujas NAFW152826-IKO - NAW152826-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/agujas/naw152826-iko>

IKO
NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE
With Inner Ring

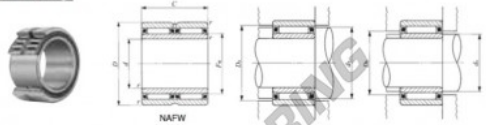

Shaft dia. mm	Identification number	Mess (Ref.) g	Boundary dimensions mm					Standard mounting dimensions mm				
			d	D	C	r _s min ⁽¹⁾	F _w	d _b Max.	D _s Min.	d _s Max.	D _b	
15	NAFW 152826	77.5	15	28	26	0.3	20	23.6	28	17	19	20.6
Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾	Assembled roller ring									
N	N	rpm	LRT 152026									
16 400	27 100	25 000										

Notes: (1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to grease lubrication.
Remarks: 1. The outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3663952384443
Diámetro interior	15 mm
Diámetro exterior	28 mm
Espesor	26 mm
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE