


Seguidor de leva CFES12-BR-IKO - CFES12-BR-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-bola/seguidor-leva/cfes12-br-iko>



CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Hexagon Hole

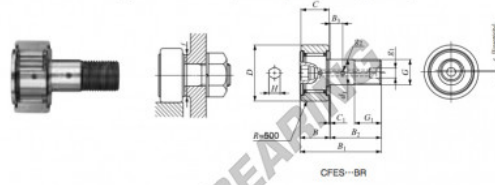

Stud dia. mm	Identification number								Mass (Ref.) g	D	C	d ₁				
	Shield type				Sealed type											
	With crowned outer ring		With cylindrical outer ring		With crowned outer ring		With cylindrical outer ring									
12	CFES 12 BR								95	30	14	12				
Boundary dimensions mm																
G	G ₁	B _{max}	B ₁ _{max}	B ₂	B ₃	C ₁	g ₁	g ₂	H	ε _{max}	Mounting dimension f Min. mm	Maximum spinning torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N	
M12×1.5	13	15.2	40.2	25	6	0.6	6	3	6	0.6	0.4	21	21.9	7 910	9 790	9 790

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3663952443539
Diámetro interior	12 mm
Diámetro interior	0.472" inch
Diámetro exterior	30 mm
Diámetro exterior	1.181" inch
Espesor	14 mm
Espesor	0.551" inch
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE