


Seguidor de leva CFES16-BR-IKO - CFES16-BR-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-bola/seguidor-leva/cfes16-br-iko>



CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Hexagon Hole

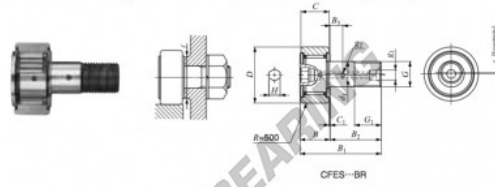

Stud dia. mm	Identification number								Mass (Ref.) g	D	C	d ₁				
	Shield type				Sealed type											
	With crowned outer ring		With cylindrical outer ring		With crowned outer ring		With cylindrical outer ring									
16	CFES 16 BR								170	35	18	16				
Boundary dimensions mm																
G	G ₁	B max	B ₁ max	B ₂	C ₁	g ₁	g ₂	H	ε ⁽¹⁾ K _{max}	Mounting dimension f Min. mm	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N		
M16×1.5	17	19.6	52.1	32.5	8	0.8	0.6	3	6	0.6	0.5	26	58.5	12 000	18 300	18 300

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3663952443614
Diámetro interior	16 mm
Diámetro interior	0.63" inch
Diámetro exterior	35 mm
Diámetro exterior	1.378" inch
Espesor	18 mm
Espesor	0.709" inch
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE