


Seguidor de leva CFE6-VUU-IKO - CFE6-VUU-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-bola/seguidor-leva/cfe6-vuu-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

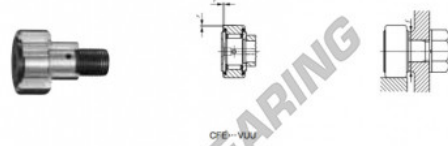

Outside diameter of eccentric outer ring mm	Identification number				Mass (Ref.)									
	Shield type		Sealed type		g	D	C	d _e						
9	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	21	16	11	9						
CFE 6 VUU														
Boundary dimensions mm														
G	B ₃	B _{max}	B ₁ max	B ₂	C ₁	g ₁	G ₁	f ₁ min	Excentricity E	Mounting dimension f Min. mm	Maximum operating torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
M 6 × 1	7.5	12.2	28.2	16	0.6	*4	8.5	0.3	0.4	11	2.7	6 980	8 500	1 950

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060460882
Diámetro interior	9 mm
Diámetro interior	0.354" inch
Diámetro exterior	16 mm
Diámetro exterior	0.63" inch
Espesor	11 mm
Espesor	0.433" inch
Peso	21 g
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE