


Seguidor de leva CFE24-VUUR-IKO - CFE24-VUUR-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-bola/seguidor-leva/cfe24-vuur-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers **Full Complement Type/With Screwdriver Slot**

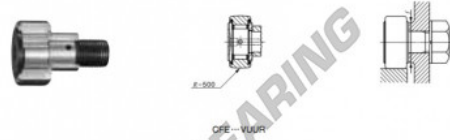

Outside diameter of eccentric outer ring mm	Identification number				Mass (Ref.)			
	Shield type		Sealed type		g	D	C	d _e
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
33			CFE 24	VUUR	900	62	29	33

Boundary dimensions mm														
G	B ₃	B _{max}	B ₁ _{max}	B ₂	C ₁	B ₁	G ₁	r ₁ ^(*)	Excentricity E	Mounting dimension f Min. mm	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
M24 × 1.5	25.5	30.6	80.1	49.5	0.8	8	24	1	0.8	40	215	46 800	92 000	52 000

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3663952458168
Diámetro interior	33 mm
Diámetro exterior	62 mm
Espesor	29 mm
Peso	900 g
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE