


Rodamiento axial de agujas AZK11016017-IKO - AZK11016017-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/axial-agujas/azk11016017-iko>

IKO
THRUST BEARINGS
Thrust Roller Bearings

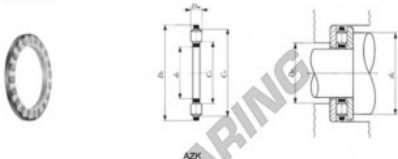

| Shaft dia. mm | Identification number | | | | | | | |
|---------------|-----------------------|---------------|-----------------------|---------------|------------|------------|---------------|--|
| | Thrust roller bearing | Mass (Ref.) g | Thrust roller bearing | Mass (Ref.) g | Inner ring | Outer ring | Mass (Ref.) g | |
| 110 | AZ 11016040 | 3 220 | AZK 11016017 | 1 320 | WS 110160 | GS 110160 | 950 | |

| Boundary dimensions mm | | | | | | | | | | Standard mounting dimensions mm | Basic dynamic load rating C | Basic static load rating C ₀ | Allowable rotational speed ⁽²⁾ | |
|------------------------|-----|----|----------------|----------------|----------------|------|------------------------------------|----------------|----------------|---------------------------------|-----------------------------|---|---|-------|
| d | D | T | d _c | D _c | D _w | B | r _{s,mini} ⁽¹⁾ | C _i | C _o | d _s Min. | D _s Max. | N | N | rpm |
| 110 | 160 | 40 | 110.1 | 159.5 | 17 | 11.5 | 1.1 | 120 | 154 | 153 | 121 | 282 000 | 1 030 000 | 2 000 |

Notes: ⁽¹⁾ Minimum allowable value of chamfer dimension r
⁽²⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

CARACTERÍSTICAS DEL PRODUCTO

| | |
|-------------------|---------------|
| Marca | IKO |
| Nº Ean13 | 3616060466198 |
| Diámetro interior | 110 mm |
| Diámetro exterior | 160 mm |
| Espesor | 17 mm |
| Peso | 1320 g |
| Envasado | 1 |

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE