

Rotulas TAPR GIHN-K-20LO-DURBAL - GIHN-K-20LO-DURBAL


<https://www.123rodamiento.es/rodamiento-cojinete/rotulas/tapr/gihn-k-20lo-durbal>

GIHN-K-20LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

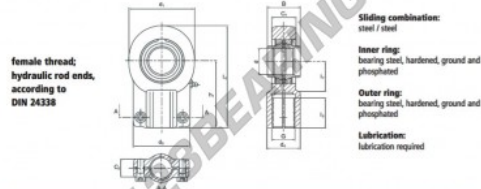

female thread; hydraulic rod ends, according to DIN 24338

Sliding combination:

steel / steel

Inner ring: bearing steel, hardened, ground and phosphated

Outer ring: bearing steel, hardened, ground and phosphated

Lubrication: lubrication required

order number	d	d ₁	G	d ₂	B	C ₁	C ₂
GIHN-K 20 LO	20	47	M 16 x 1,5	25,0	47	20	17

type	l ₁ min	measurement [mm]	l ₂	l ₃	load rating C ₀ [kN]	weight [kg]
GIHN-K / GIHN-KL 20 LO	23	52	77,0	22	48,0	0,40

CARACTERÍSTICAS DEL PRODUCTO

Marca	DURBAL
N° Ean13	3663952500102
Diámetro interior	20 mm
Diámetro exterior	47 mm
Espesor	17 mm
Tipo	TAPR
Peso	400 g
Hilo	Rosca derecha
Lubricación	con
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE