


## Rodamiento de agujas BHKM1730JU-JTEKT - BHKM1730JU-JTEKT

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/agujas/bhkm1730ju-jtekt>

Drawn cup needle roller bearings Koyo

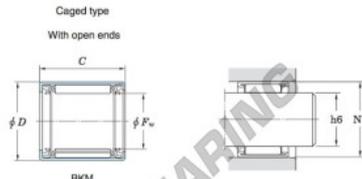

Boundary dimensions (mm)			Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )		Bearing No. <sup>2)</sup>	
F <sub>w</sub>	D	C	b min.	C <sub>r</sub>	C <sub>10r</sub>	Oil lub.	Caged type	
							With open ends	With closed end
17	24	30	—	20.1	31.3	11 000 <sup>1)</sup>	BHKM1730JU	

Full complement type		Recommended dimensions (mm)				Refer. Mass (g)	
With open ends	With closed end	Shaft dia. (φ6) min.	max.	Housing bore dia. (N7) min.	max.	With open ends	With closed end
—	—	16.989	17.000	23.972	23.993	35	—

### CARACTERÍSTICAS DEL PRODUCTO

Marca	JTEKT
N° Ean13	4549250328763
Diámetro interior	17 mm
Diámetro interior	0.669" inch
Diámetro exterior	24 mm
Diámetro exterior	0.945" inch
Espesor	30 mm
Espesor	1.181" inch
Peso	35 g
Envasado	1
Estándar	Ninguna norma

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE