


## Rodamiento de agujas 17BKM2517-JBUUH-JTEKT - 17BKM2517-JBUUH-JTEKT

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/agujas/17bkm2517-jbuuh-jtekt>

Drawn cup needle roller bearings 

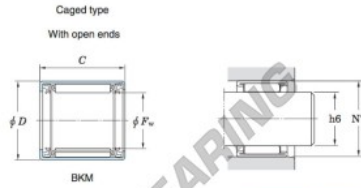

Boundary dimensions (mm)				Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )		Bearing No. <sup>2)</sup>	
$F_w$	$D$	$C$	$b$ min.	$C_0$	$C_{0r}$	Oil lub.		Caged type	
								With open ends	With closed end
17	25	16.70	—	7.30	7.90	11 000 <sup>1)</sup>		17BKM2517JBUUH	

Full complement type		Recommended dimensions (mm)				(Refer.) Mass (g)	
With open ends	With closed end	Shaft dia. (φ6) min.	max.	Housing bore dia. (N7) min.	max.	With open ends	With closed end
—	—	16.989	17.000	24.972	24.993	20	—

### CARACTERÍSTICAS DEL PRODUCTO

Marca	JTEKT
N° Ean13	3616060465306
Diámetro interior	17 mm
Diámetro exterior	25 mm
Espesor	16.7 mm
Peso	20 g
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE