


## Rodamiento rodillos NN3026-JTEKT - NN3026-JTEKT

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/rodillos/nn3026-jtekt>

Double-row cylindrical roller bearings 

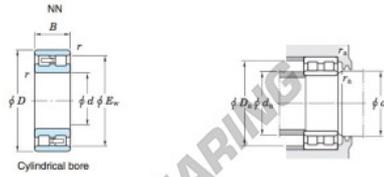

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
d	D	B	r	F <sub>w</sub>	C	C <sub>107</sub>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
130	200	52	2	—	182	283	2 900	3 500	NN3026	

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	d <sub>a</sub>		D <sub>s</sub>		r <sub>s</sub>		Cylindrical bore	Tapered bore
		min.	max.	min.	max.	min.	max.		
		139	—	—	191	183	2	5.94	5.76

## CARACTERÍSTICAS DEL PRODUCTO

Marca	JTEKT
N° Ean13	4549250245763
Diámetro interior	130 mm
Diámetro exterior	200 mm
Espesor	52 mm
Peso	5940 g
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE