


## Rodamiento conico 46228-JTEKT - 46228-JTEKT

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/conico/46228-jtekt>

Double-row tapered roller bearings — Koyo  
TDO type

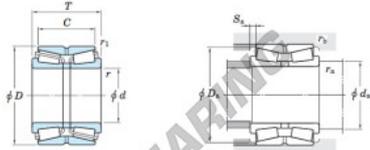

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
d	D	T	C	r <sub>1</sub> min.	r <sub>1</sub> max.	C <sub>r</sub>	C <sub>0r</sub>	Grease lub.	Oil lub.
140	210	53	47	2.5	0.6	239	404	1300	1800

Bearing No.	Mounting dimensions (mm)					Constant e	Axial load factors			Refer.) Mass (kg)
	d <sub>4</sub> min.	D <sub>4</sub> min.	S <sub>4</sub> min.	r <sub>4</sub> max.	r <sub>5</sub> max.		Y <sub>2</sub>	Y <sub>3</sub>	Y <sub>0</sub>	
46228	152	196	3	2	0.6	0.33	2.03	3.02	1.98	5.85

### CARACTERÍSTICAS DEL PRODUCTO

Marca	JTEKT
Nº Ean13	4549250133107
Diámetro interior	140 mm
Diámetro interior	5.512" inch
Diámetro exterior	210 mm
Diámetro exterior	8.268" inch
Espesor	47 mm
Espesor	1.85" inch
2º Espesor	53 mm
2º Espesor	2.087" inch
Peso	5850 g
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE