


Rodamiento conico 45322-JTEKT - 45322-JTEKT

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/conico/45322-jtekt>

Double-row tapered roller bearings
TDI type

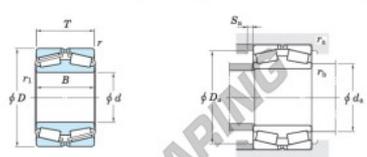

Boundary dimensions (mm)					Basic load ratings (kN)		Limiting speeds (min ⁻¹)		
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> max.	<i>r</i> ₁ max.	<i>C</i> _r	<i>C</i> _{0r}	Grease lub.	Oil lub.
110	180	56	56	2	2.5	300	505	1 600	2 100

Bearing No.	Mounting dimensions (mm)						Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)
	<i>d</i> _a max.	<i>D</i> _a max.	<i>D</i> _a min.	<i>S</i> _a min.	<i>r</i> _a max.	<i>r</i> _b max.		<i>Y</i> ₂	<i>Y</i> ₃	<i>Y</i> ₀	
45322	128	170	160	4	2	2	0.35	1.95	2.90	1.91	5.40

CARACTERÍSTICAS DEL PRODUCTO

Marca	JTEKT
N° Ean13	4549250130632
Diámetro interior	110 mm
Diámetro interior	4.331" inch
Diámetro exterior	180 mm
Diámetro exterior	7.087" inch
Espesor	56 mm
Espesor	2.205" inch
Peso	5400 g
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE