


## Rodamiento conico 45272-JTEKT - 45272-JTEKT

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/conico/45272-jtekt>

Double-row tapered roller bearings  
TDI type Koyo

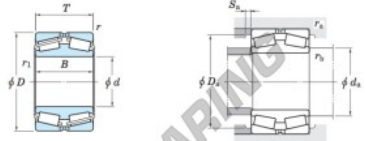

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> max.	<i>r</i> min.	<i>C<sub>r</sub></i>	<i>C<sub>0r</sub></i>	Grease lub.	Oil lub.
360	540	134	134	5	6	2 050	3 910	400	540

Bearing No.	Mounting dimensions (mm)						Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)
	<i>d<sub>a</sub></i> max.	<i>D<sub>a</sub></i> max.	<i>D<sub>a</sub></i> min.	<i>S<sub>a</sub></i> min.	<i>r<sub>a</sub></i> max.	<i>r<sub>b</sub></i> max.		<i>Y<sub>2</sub></i>	<i>Y<sub>3</sub></i>	<i>Y<sub>0</sub></i>	
45272	406	518	488	11	4	5	0.32	2.12	3.15	2.07	101

### CARACTERÍSTICAS DEL PRODUCTO

Marca	JTEKT
Nº Ean13	3663952482088
Diámetro interior	360 mm
Diámetro exterior	540 mm
Espesor	134 mm
Peso	101000 g
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE