


Rodamiento conico 45288-JTEKT - 45288-JTEKT

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/conico/45288-jtekt>

Double-row tapered roller bearings
TDI type

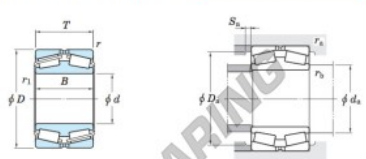

| Boundary dimensions (mm) | | | | | | Basic load ratings (kN) | | Limiting speeds (min ⁻¹) | |
|--------------------------|-----|-----|-----|---|----------------|-------------------------|-----------------|--------------------------------------|----------|
| d | D | B | T | r | r ₁ | C _r | C _{0r} | Grease lub. | Oil lub. |
| 440 | 650 | 157 | 157 | 6 | 6 | 2 750 | 5 500 | 300 | 390 |

| Bearing No. | Mounting dimensions (mm) | | | | | | Con- stant e | Axial load factors | | | (Refer.) Mass (kg) |
|-------------|--------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|--------------------|--------------------|----------------|----------------|--------------------------|
| | d _a max. | D _a max. | D _a min. | S _a min. | r _a max. | r _b max. | | Y ₂ | Y ₃ | Y ₀ | |
| 45288 | 500 | 622 | 592 | 10 | 5 | 5 | 0.28 | 2.43 | 3.61 | 2.37 | 182 |

CARACTERÍSTICAS DEL PRODUCTO

| | |
|-------------------|---------------|
| Marca | JTEKT |
| Nº Ean13 | 3663952482163 |
| Diámetro interior | 440 mm |
| Diámetro interior | 17.323" inch |
| Diámetro exterior | 650 mm |
| Diámetro exterior | 25.591" inch |
| Espesor | 157 mm |
| Espesor | 6.181" inch |
| Peso | 182000 g |
| Envasado | 1 |

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE